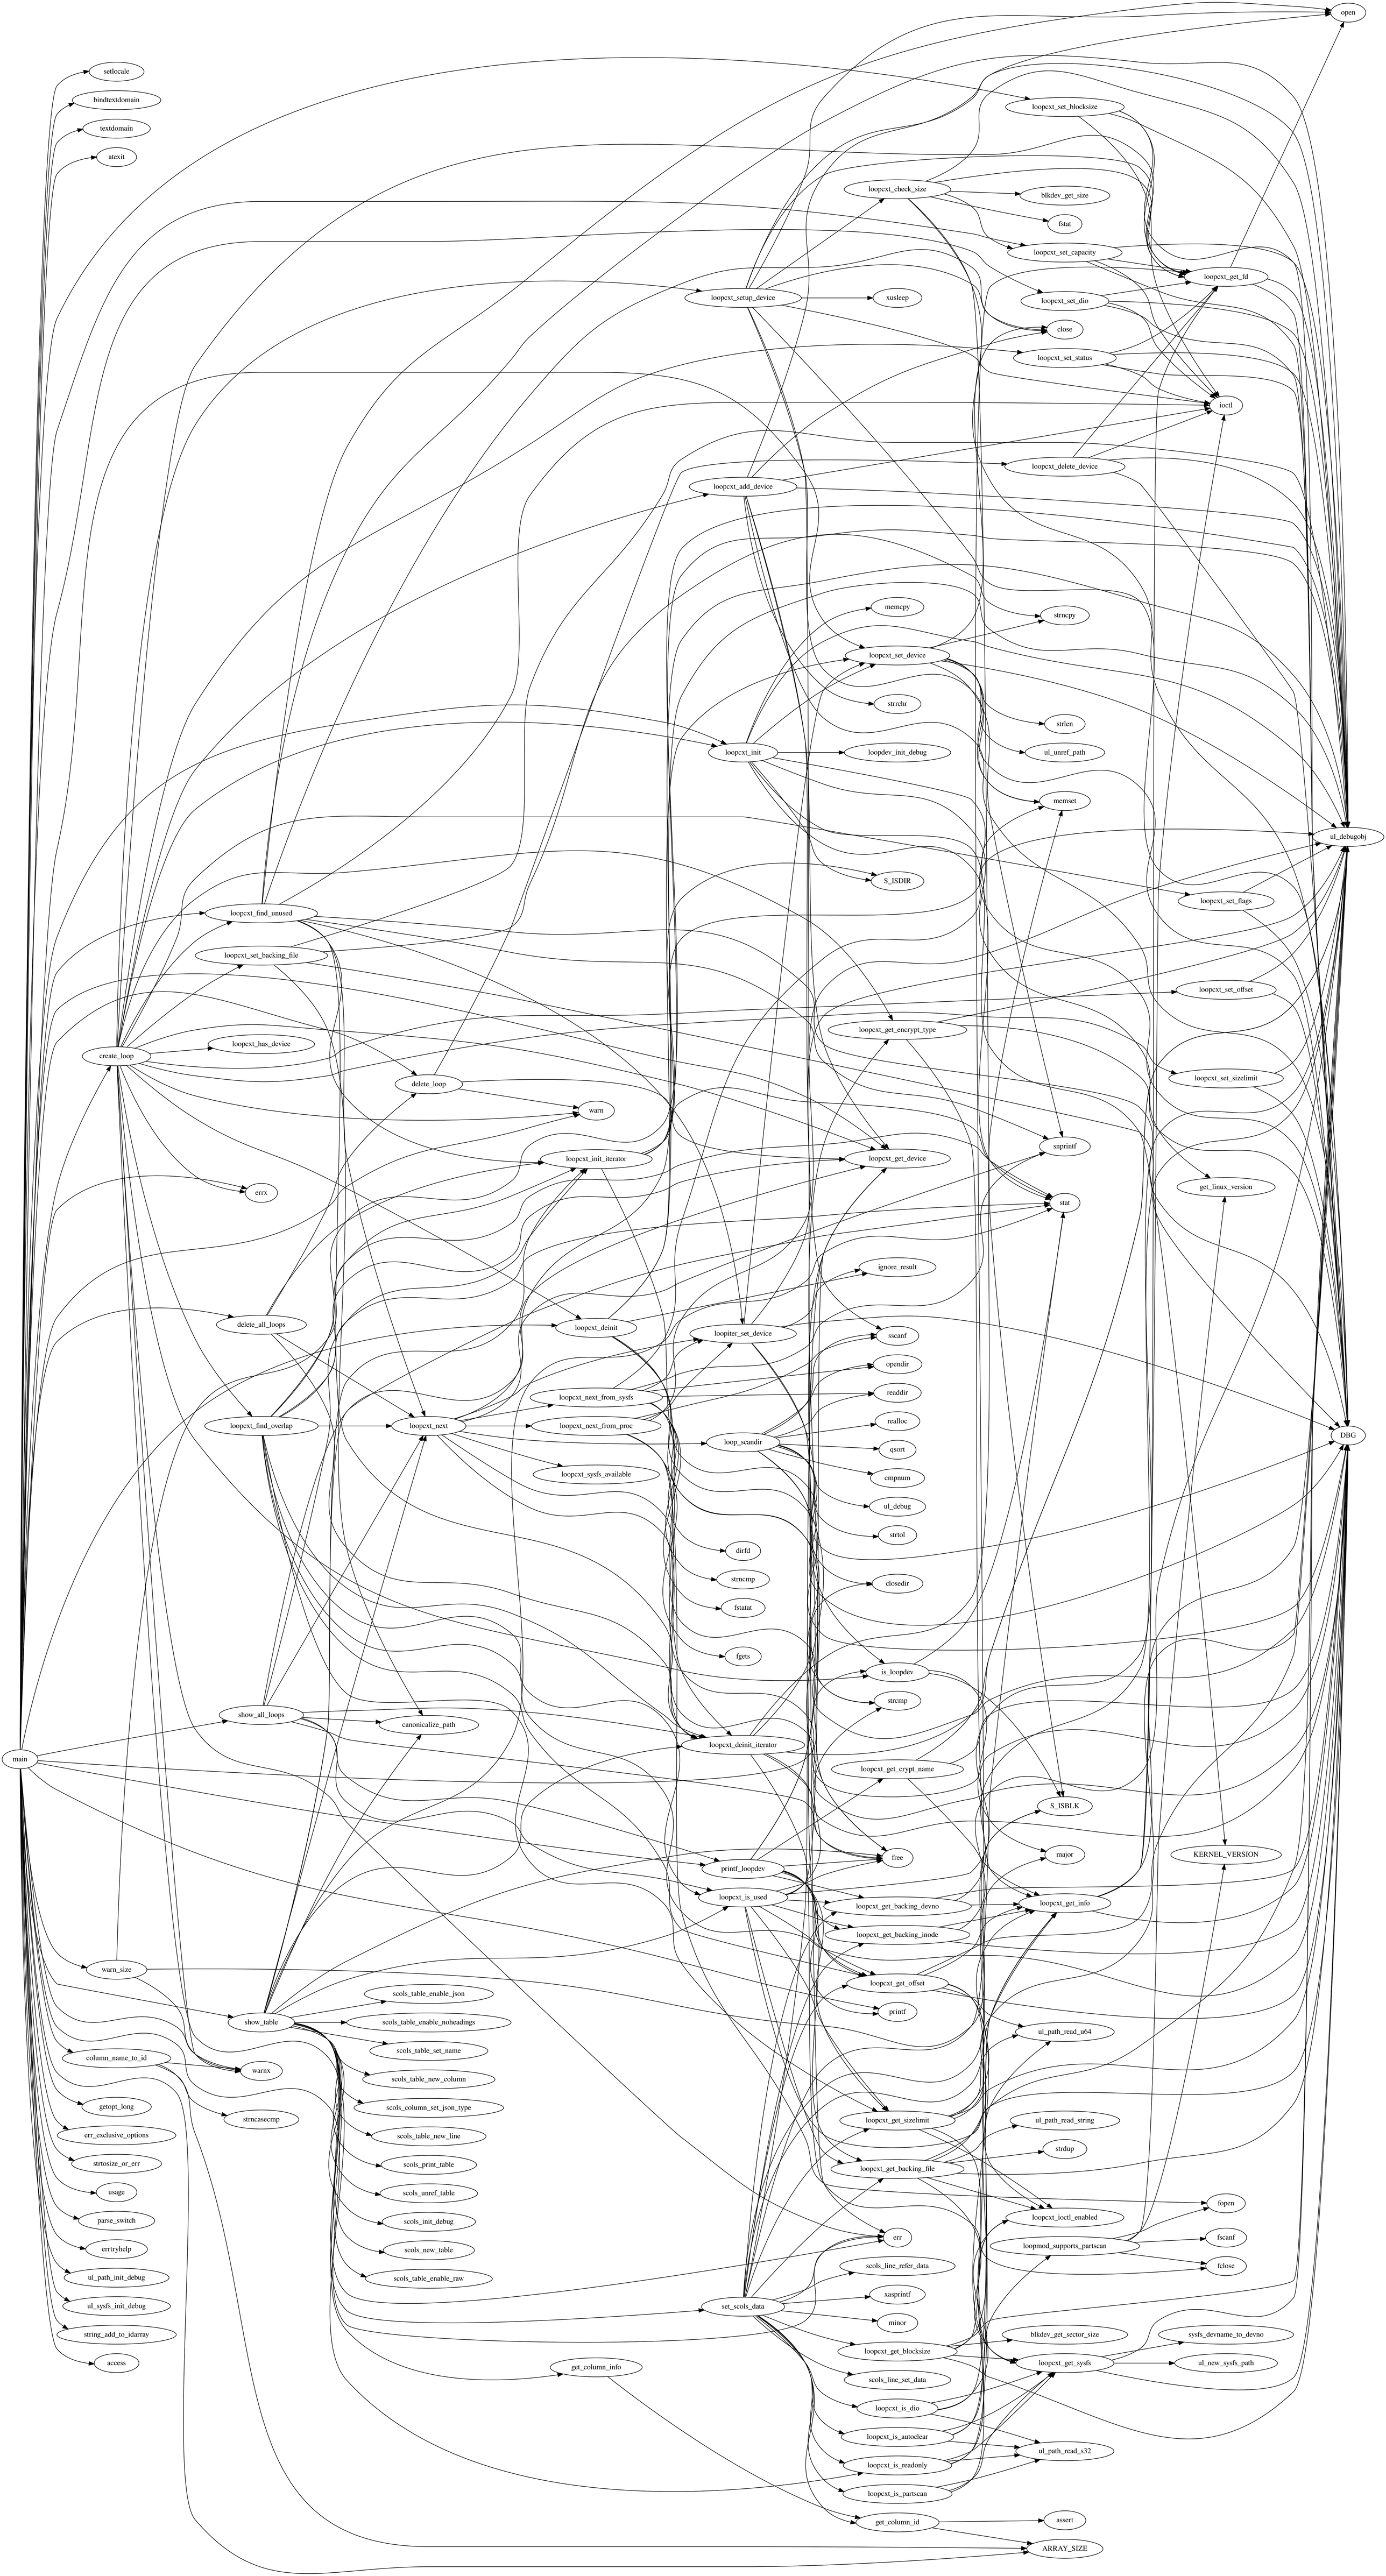
setlocale
bindtextdomain
textdomain
atexit
open
loopcxt_set_blocksize
loopcxt_check_size
blkdev_get_size
fstat
loopcxt_set_capacity
loopcxt_get_fd
loopcxt_setup_device
xusleep
loopcxt_set_dio
close
loopcxt_set_status
ioctl
loopcxt_delete_device
loopcxt_add_device
memcpy
strncpy
loopcxt_set_device
strrchr
strlen
loopcxt_init
loopdev_init_debug
ul_unref_path
memset
ul_debugobj
S_ISDIR
loopcxt_set_flags
loopcxt_find_unused
loopcxt_set_backing_file
loopcxt_set_offset
loopcxt_get_encrypt_type
loopcxt_has_device
create_loop
delete_loop
loopcxt_set_sizelimit
warn
loopcxt_init_iterator
loopcxt_get_device
snprintf
get_linux_version
errx
stat
ignore_result
delete_all_loops
loopcxt_deinit
loopiter_set_device
sscanf
opendir
loopcxt_next_from_sysfs
readdir
loopcxt_find_overlap
loopcxt_next
loopcxt_next_from_proc
realloc
loop_scandir
qsort
DBG
cmpnum
loopcxt_sysfs_available
ul_debug
strtol
dirfd
strncmp
closedir
fstatat
fgets
is_loopdev
show_all_loops
canonicalize_path
strcmp
loopcxt_deinit_iterator
main
loopcxt_get_crypt_name
S_ISBLK
free
major
KERNEL_VERSION
printf_loopdev
loopcxt_is_used
loopcxt_get_backing_devno
loopcxt_get_info
loopcxt_get_backing_inode
warn_size
loopcxt_get_offset
scols_table_enable_json
printf
show_table
scols_table_enable_noheadings
ul_path_read_o64
scols_table_set_name
column_name_to_id
warnx
scols_table_new_column
scols_column_set_json_type
strncasecmp
loopcxt_get_sizelimit
ul_path_read_string
getopt_long
scols_table_new_line
strdup
err_exclusive_options
strtosize_or_err
scols_print_table
loopcxt_get_backing_file
usage
scols_unref_table
fopen
parse_switch
scols_init_debug
loopcxt_ioctl_enabled
errtryhelp
scols_new_table
loopmod_supports_partscan
fscanf
err
ul_path_init_debug
scols_table_enable_raw
scols_line_refer_data
fclose
ul_sysfs_init_debug
xasprintf
set_scols_data
minor
string_add_to_idarray
blkdev_get_sector_size
sysfs_devname_to_devno
loopcxt_get_blocksize
loopcxt_get_sysfs
ul_new_sysfs_path
access
get_column_info
scols_line_set_data
loopcxt_is_dio
loopcxt_is_autoclear
ul_path_read_s32
loopcxt_is_readonly
loopcxt_is_partscan
get_column_id
assert
ARRAY_SIZE